



Electrolux

Digital Undercounter 2 Door Refrigerated Table, -2+10° C, Full AISI 304

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux

2 Door Refrigerated Table, -2+10°C, Full AISI 304
Digital Undercounter



Digital Undercounter

2 Door Refrigerated Table, -2+10°C, Full AISI 304

790096 (HB2PAC3)

2-door refrigerated table, -2+10°C, AISI 304 - 220-230V/1N/50Hz - ASIA

Short Form Specification

Item No.

The Electrolux range of refrigerated tables combines the convenience of worktop space with cold storage located below. This versatility allows remarkable savings in space while offering a functional and modular solution to any kitchen requirement. The range comprises of counters with a number of compartments, with built-in compressor unit, in various door or drawer configurations. The model detailed in this sheet has two compartments, two full doors and operates over the temperature range of -2 °C to 10 °C.

Main Features

- IP65 digital control panel allows for temperature and parameter setting as well as to activate defrosting when necessary.
- Unique airflow design to allow installation against the wall or against other appliances, even on the cooling unit side to maximize the use of kitchen space.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Suitable for use in ambient temperatures of up to 43 °C.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Refrigerated compartment designed to accommodate GN 1/1 containers.
- Door frame heater, activated according to external temperature, avoids condensation build-up around the door frame.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.

Construction

- Built-in compressor to suit operating conditions.
- Mounted on 150 mm adjustable feet.
- Anti-drip profile on stainless steel worktop edge.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Access to all components from the front.
- Fully extractable cooling unit to facilitate maintenance.
- Recessed area in the back to facilitate installation.
- Electronic protection against high voltage peaks.
- Removable magnetic gasket door with hygienic design.
- Constructed from the highest quality AISI 304 Stainless steel.
- High density polyurethane insulation, 60 mm thickness, HCFC free.
- Rounded internal corners for ease of cleaning.
- CFC and HCFC free.

Included Accessories

- 2 of 1x1/1GN PVC grid for counters PNC 880299

Optional Accessories

- Lock kit for counters PNC 880227

APPROVAL: _____



Electrolux

**Digital Undercounter
2 Door Refrigerated Table, -2+10°C,
Full AISI 304**


- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- 1x1/1GN PVC grid for counters PNC 880299
- Kit of 5 wheels (front with brake) for cabinets and counters PNC 880301
- Kit of 2x½ drawers for counters PNC 880305
- Kit of 3x½ drawers for counters PNC 880309
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457



**Digital Undercounter
2 Door Refrigerated Table, -2+10°C, Full AISI 304**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2016.02.25

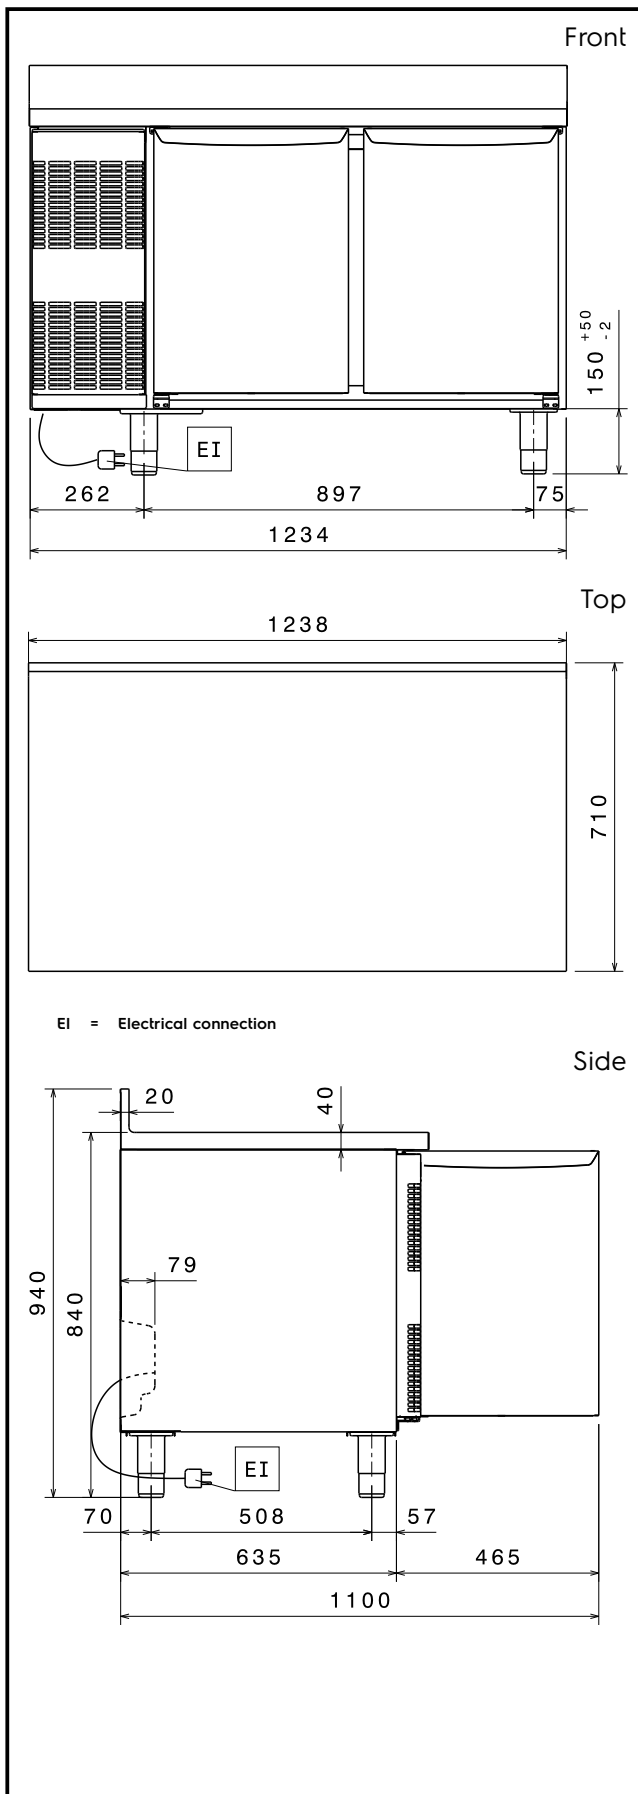

Electric

Supply voltage:	790096 (HB2PAC3)	220/230 V/1N ph/50 Hz
Electrical power:		0.35 kW

Key Information:

Door hinges:	1 Left+1 Right
External dimensions, Height:	840 mm
External dimensions, Width:	1238 mm
External dimensions, Depth:	710 mm
External dimensions, Depth with Doors Open:	1100 mm
Number and type of doors:	2 Full
Gross capacity:	265 lt
Depth with doors open:	1100 mm
Number and type of grids (included):	2 - GN 1/1

Refrigeration Data

Compressor power:	1/3 hp
Refrigerant type:	R404a
Refrigeration power:	877 W
Refrigerant weight:	250 g
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C